

## EE359 – Lecture 9 Outline

- Announcements
  - MT tentatively scheduled Wed. Nov. 4 8:45-10:45am.
- Capacity of Freq. Selective Fading Channels
- Linear Modulation Review
- Linear Modulation Performance in AWGN
- Modulation Performance in Fading
  - Outage Probability
  - Average  $P_s$  ( $P_b$ )

## Review of Last Lecture

- Capacity of Flat-Fading Channels
  - Fading Statistics Known (few results)
  - Fading Known at RX (average capacity)


$$C = \int_0^{\infty} B \log_2(1 + \gamma) p(\gamma) d\gamma \leq B \log_2(1 + \bar{\gamma})$$

- Fading Known at TX and RX

- Optimal Rate and Power Adaptation

$$C = \max_{S(\gamma) : E[S(\gamma)] = \bar{S}} \int_0^{\infty} B \log_2 \left( 1 + \frac{\gamma S(\gamma)}{\bar{S}} \right) p(\gamma) d\gamma$$

$$\frac{C}{B} = \int_{\gamma_0}^{\infty} \log \left( \frac{\gamma}{\gamma_0} \right) p(\gamma) d\gamma$$




## Review Continued: Channel Inversion


- Fading inverted to maintain constant SNR
- Simplifies design (fixed rate)
- Greatly reduces capacity
  - Capacity is zero in Rayleigh fading
- Truncated inversion
  - Invert channel above cutoff fade depth
  - Constant SNR (fixed rate) above cutoff
  - Cutoff greatly increases capacity
    - Close to optimal

## Capacity in Flat-Fading

### Rayleigh




### Log-Normal



## Frequency Selective Fading Channels

- For TI channels, capacity achieved by water-filling in frequency
- Capacity of time-varying channel unknown
- Approximate by dividing into subbands
  - Each subband has width  $B_c$  (like MCM).
  - Independent fading in each subband
  - Capacity is the sum of subband capacities



## Passband Modulation Tradeoffs

- Want high rates, high spectral efficiency, high power efficiency, robust to channel, cheap. **Our focus**
- Amplitude/Phase Modulation (MPSK, MQAM)
  - Information encoded in amplitude/phase
  - More spectrally efficient than frequency modulation
  - Issues: differential encoding, pulse shaping, bit mapping.
- Frequency Modulation (FSK)
  - Information encoded in frequency
  - Continuous phase (CPFSK) special case of FM
  - Bandwidth determined by Carson's rule (pulse shaping)
  - More robust to channel and amplifier nonlinearities

## Amplitude/Phase Modulation

- Signal over  $i$ th symbol period:

$$s(t) = s_{i1}g(t)\cos(2\pi f_c t + \phi_0) - s_{i2}g(t)\sin(2\pi f_c t + \phi_0)$$

- Pulse shape  $g(t)$  typically Nyquist
- Signal constellation defined by  $(s_{i1}, s_{i2})$  pairs
- Can be differentially encoded
- $M$  values for  $(s_{i1}, s_{i2}) \Rightarrow \log_2 M$  bits per symbol
- $P_s$  depends on
  - Minimum distance  $d_{\min}$  (depends on  $\gamma_s$ )
  - # of nearest neighbors  $\alpha_M$
  - Approximate expression:  $P_s \approx \alpha_M Q(\sqrt{\beta_M \gamma_s})$

## Alternate Q Function Representation

- Traditional Q function representation

$$Q(z) = p(x > z) = \int_z^\infty \frac{1}{\sqrt{2\pi}} e^{-x^2/2} dx, \quad x \sim N(0,1)$$

- Infinite integrand
- Argument in integral limits
- New representation (Craig'93)

$$Q(z) = \frac{1}{\pi} \int_0^{\pi/2} e^{-z^2 / (\sin^2 \varphi)} d\varphi$$

- Leads to closed form solution for  $P_s$  in PSK
- Very useful in fading and diversity analysis


## Linear Modulation in Fading

- In fading  $\gamma_s$  and therefore  $P_s$  random
- Performance metrics:
  - Outage probability:  $p(P_s > P_{\text{target}}) = p(\gamma < \gamma_{\text{target}})$
  - Average  $P_s$ ,  $\bar{P}_s$ :

$$\bar{P}_s = \int_0^\infty P_s(\gamma) p(\gamma) d\gamma$$


- Combined outage and average  $P_s$  (next lecture)

## Outage Probability

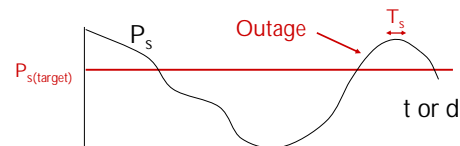

- Probability that  $P_s$  is above target
- Equivalently, probability  $\gamma_s$  below target
- Used when  $T_c \gg T_s$

## Average $P_s$

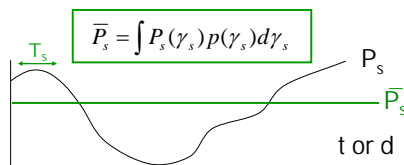

- Expected value of random variable  $P_s$
- Used when  $T_c \sim T_s$
- Error probability much higher than in AWGN alone

## Main Points

- Capacity of frequency-selective fading channels obtained by breaking it into subchannels
- Linear modulation more spectrally efficient but less robust than nonlinear modulation
- $P_s$  approximation in AWGN:  $P_s \approx \alpha_M Q(\sqrt{\beta_M \gamma_s})$ 
  - Alternate Q function representation simplifies calculations
- In fading  $P_s$  is a random variable, characterized by average value, outage, or combined outage/average
- Outage probability based on target SNR in AWGN.
- Fading greatly increases average  $P_s$ .