

Assignment #4

AJAX & JQuery

CS193C Summer 2011, Young

For our last assignment we will experiment with AJAX and JQuery. This assignment is due Tuesday August 9th at 3:15pm. In order to get all your assignments graded in time to make the end-of-quarter grades deadline, no assignments will be accepted after the Friday the 12th.


We'll keep it relatively simple as I know you also have your Class Projects to work on.

Warning: You'll need to request a Stanford CGI account to do this assignment. *You should do so immediately.* You'll need this to carry out the assignment, and it can take up to 24-hours for the account to become active. For more information go to:

<https://itservices.stanford.edu/service/cgi/personal>

AJAX

For the AJAX section of our assignment we'll retrieve weather information from weather.yahoo.com. Here is a screenshot showing the AJAX assignment in action:

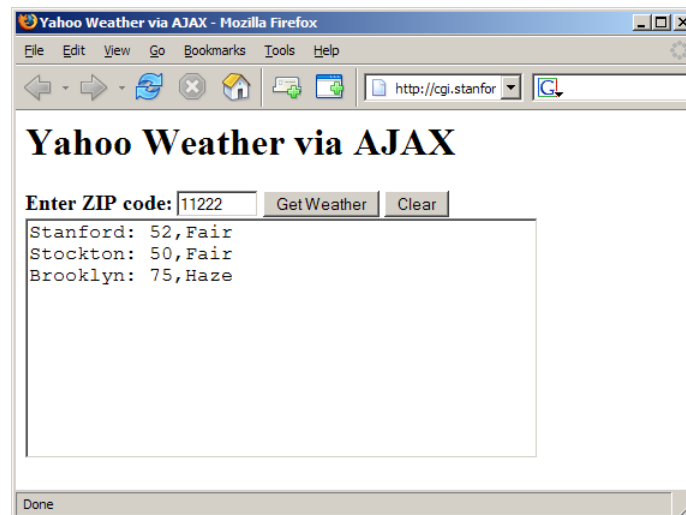

The user enters in a ZIP code and clicks on "Get Weather". The weather for that ZIP code is retrieved from Yahoo and added to a text area. Weather information listed should include the City corresponding to the ZIP code, the temperature and a brief condition description (which is provided to us by Yahoo Weather). The text area should list all requests made. The user can click on the "Clear" button to clear the text area.

We'll need to teach you a few things in order to get this assignment up and running.

Security

As we've discussed in class, AJAX limits our ability to access information on the web and requires that both the webpage requesting the information and the web server providing the information via AJAX are on the same server. We have a proxy server running at Stanford which passes requests from Stanford's webserver onto Yahoo and serves up the results. Unfortunately due to Stanford's security restrictions this proxy must run on `cgi.stanford.edu`. Trying to access `cgi.stanford.edu` from a webpage on `www.stanford.edu` also violates AJAX security. Therefore you'll need to have your webpages on `cgi.stanford.edu`. In this section we describe how you'll go about carrying this out.

1. First you need to have a cgi account. If you haven't already, go to:

<https://itservices.stanford.edu/service/cgi/personal>

and get your account up.

2. You should now have a cgi-bin folder in your Leland directory. You'll need to place your webpage in the cgi-bin folder *rather than* the WWW folder.
3. To access your file, you'll need to go to `cgi.stanford.edu`. For example:

`http://cgi.stanford.edu/~molly/ajaxweather.html`

Requesting Weather Reports

You'll need to access weather reports from our proxy server. The URL for our proxy server is:

`http://cgi.stanford.edu/~psyong/cgi-bin/a3.php?yws_path=encodedRequest`

where *encodedRequest* is a request to the Yahoo Weather webserver and is encoded using the URI encoding technique we briefly discussed when talking about cookies. This technique translates symbols to special encoded characters—for example the space character is encoded as `%20`. The request we're most interested in is weather for a particular ZIP code. This request is specified as `"p=XXXXX"` where `XXXXX` is the actual ZIP code.¹ The `'='` gets encoded as `%3D`.

Here is an example accessing the weather at Stanford (ZIP code 93405):

`http://cgi.stanford.edu/~psyong/cgi-bin/a3.php?yws_path=p%3D94305`

You can encode your request programmatically using something like this:

```
var weatherURL = "http://cgi.stanford.edu/~psyong/cgi-bin/a3.php?yws_path="
                + encodeURIComponent("p=" + zipcode);
```

`encodeURIComponent` is a standard JavaScript function to encode a string.

Getting Weather Information

You'll pass your URL including the encoded request for the Yahoo Weather server on to our proxy via AJAX. After a brief delay, you should get an XML RSS response providing the

¹ There are a few fancier things you can do as well (see <http://developer.yahoo.com/weather/>) for more information.

weather at the location. Try typing this directly into the web browser in order to see what the XML looks like:

```
http://cgi.stanford.edu/~psyoung/cgi-bin/a3.php?yws_path=p%3D94305
```

Once you've gotten the XML back, you'll need to get to specific parts of the XML returned. For the most part, you can move around in the returned XML just as you would within your own XHTML document (e.g., using `getElementsByTagName`). There are two things you need to know about working with the XML.

- The XML elements used something called an XML namespace. For example, instead of using a location tag, Yahoo returns a `yweather:location` tag in with the actual location name corresponding to the ZIP code entered. Here is the actual tag:

```
<yweather:location city="Stanford" region="CA" country="US" />
```

In IE and the latest version of Firefox, we can access the element using `getElementsByTagName("yweather:location")` on our XML document.²

- Once you get to the element, you'll need to access the attribute value. We haven't discussed this before, but it's actually rather simple. Just call `getAttribute(attrName)` and the value of the attribute will be returned.
- Use the same procedure with the `yweather:condition` tag to get the temperature and condition information.

²Some older version of Firefox used the call `getElementsByTagName("location")`, removing the `yweather` namespace.

JQuery

You've all got your projects to work on, so we'll keep the JQuery section simple and similar to the in-class examples. Our objective is to just give you just a bit of hands on experience so that you'll remember what you saw in lecture a bit better.

Start out with the `jquery-practice.html` file provided with this assignment's downloads. This file contains no JavaScript and no JQuery. It does contain HTML along with some CSS Styles. It also contains several buttons which you'll need to wire up to carry out various JQuery tasks.

Get JQuery Loaded

First things first, you need to get JQuery loaded. I've provided a JQuery file with the assignment downloads. Load it in using a standard `<script>` tag.

Turn Headings Red

Wire up the first button so that when the user clicks on it, all headings (h1, h2, and h3) turn red. Note that I've provided a style rule which you may find helpful for carrying out this task.

Fading Items

Wire up the second button so that when the user clicks on it the heading "Speakers" fads out over a 1 second (1,000 millisecond) period. Fade just the `<h3>` tag, not the subsequent paragraph on speakers. Once the heading has completely faded out, it will be removed from the normal text flow and the subsequent paragraph will be bumped up. This is normal and not something you need to correct.

Administrative Details

Include a ReadMe file with your assignment telling us which web browser you are supporting and for Ajax